


Bulblok® Rivets

Bulblok® rivet is a high strength structural rivet. The blindside upset is bulbed which helps spread the clamp force so that the joint material is not deformed. The dual locking grooves on the mandrel provide excellent resistance to vibration as well as impressive shear strength and weather tightness.

Material: Body: Stainless Steel A2 (AISI 304)
Mandrel: Stainless Steel A3 (AISI 321)
Finish: Body: Natural
Mandrel: Natural

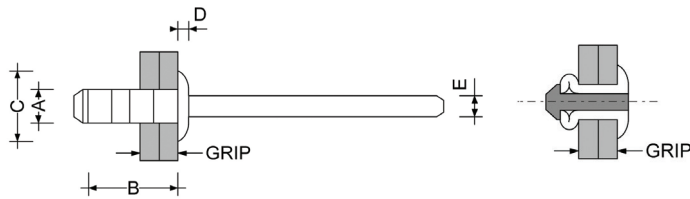

Diameter mm	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	E mm	Shear KN	Tensile KN
3.2 1/8"	AVMI-0408	1.0 - 3.0	3.4	3.2	7.0	6.5	1.0	1.8	2.5	2.0
	AVMI-0411	3.0 - 5.0	3.4	3.2	9.0	6.5	1.0	1.8	2.5	2.0
	AVMI-0414	5.0 - 7.0	3.4	3.2	11.0	6.5	1.0	1.8	2.5	2.0
4.0 5/32"	AVMI-0509	1.2 - 3.0	4.2	4.0	7.0	8.0	1.3	2.1	3.7	3.5
	AVMI-0512	3.0 - 5.0	4.2	4.0	9.0	8.0	1.3	2.1	3.7	3.5
	AVMI-0516	5.0 - 7.0	4.2	4.0	12.0	8.0	1.3	2.1	3.7	3.5
4.8 3/16"	AVMI-0611	1.5 - 3.5	5.1	4.8	9.0	10.0	1.5	2.8	5.0	5.0
	AVMI-0614	3.5 - 6.0	5.1	4.8	12.0	10.0	1.5	2.8	5.0	5.0
	AVMI-0618	6.0 - 8.5	5.1	4.8	15.0	10.0	1.5	2.8	5.0	5.0

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.

0413