


IN39101 Series

Half Hex Body / Low Profile / Open End / Metric AF

Low profile head, half hex body, used in conjunction with a metric hexagon hole to give maximum resistance to applied torque or unscrewing torque.

Material: Low carbon steel

Finish: Zinc clear Cr3

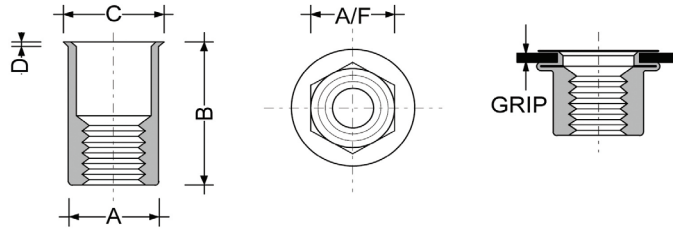

Thread Size	Part Code	Grip mm	Hex Hole A/F mm	A mm	B mm	C mm	D mm	Push Out Kgf	Pull Out Kgf	Ultimate Torque Kgf.cm
M3	IN39101-0315HH	0.5-1.5	5.0	4.9	9.3	6.0	0.5	100	400	20
	IN39101-0325HH	1.5-2.5	5.0	4.9	10.0	6.0	0.5	100	450	20
M4	IN39101-0420HH	0.5-2.0	6.0	5.9	10.5	6.8	0.4	100	600	50
M5	IN39101-0530HH	0.5-3.0	7.0	6.9	11.7	8.0	0.5	100	600	70
M6	IN39101-0630HH	0.5-3.0	9.0	8.9	14.5	10.0	0.5	150	1100	100
M8	IN39101-0830HH	0.5-3.0	11.0	10.9	16.5	12.0	0.5	150	1300	250
M10	IN39101-1035HH	0.5-3.5	13.0	12.9	20.0	14.0	0.8	300	2900	400

1Kgf.cm = 0.098 N.m Kgf = 9.807N

0921

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.