


IN39102 CE Series

Stainless Steel / Hex Body / Closed End

Low profile head, used in conjunction with a metric hexagon hole to give maximum resistance to applied torque or unscrewing torque. For applications where sealing to prevent the ingress of solids or moisture is desirable.

Material: Stainless Steel 304 / A2

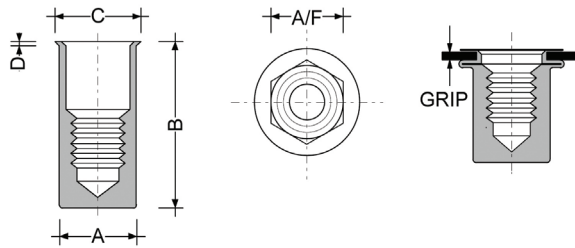

Thread Size	Part Code	Grip mm	Hex Hole A/F mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Torque- To-Turn* Nm
M4	IN39102-0425CE	0.5-2.5	6.0	5.9	16.0	7.0	0.5	6.5	2.9	4.9
M5	IN39102-0530CE	0.5-3.0	7.0	6.9	18.0	8.0	0.5	13.0	2.9	8.8
M6	IN39102-0630CE	0.5-3.0	9.0	8.9	21.0	10.0	0.5	19.0	2.9	15.7
M8	IN39102-0830CE	0.5-3.0	11.0	10.9	23.5	12.0	0.5	33.0	3.9	26.5
M10	IN39102-1035CE	1.0-3.5	13.0	12.9	26.5	14.2	0.8	-	-	-

Torque-To-Turn *

Minimum torque applied to cause the fastener to turn in the parent material.

1116

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.