


## IN58 Series

Low Profile / Open End

Low profile head. Optimal for low load bearing applications in thin sheet.

**Material:** Low carbon steel to BS 970 040A04 SAE 1008

**Finish:** Zinc Clear Cr3

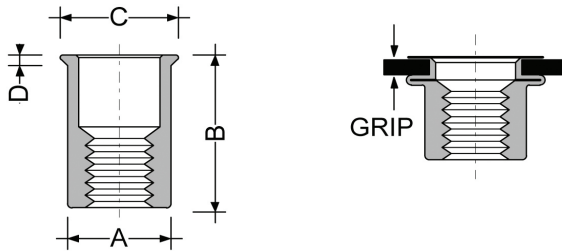

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Push Out Kgf	Pull Out Kgf	Ultimate Torque Kgf.cm
<b>M3</b>	IN58-0310	0.5-1.5	4.8	4.8	9.0	5.3	0.4	90	300	20
<b>M4</b>	IN58-0413	0.5-2.0	6.4	6.3	10.4	7.1	0.5	100	600	40
<b>M5</b>	IN58-0514	0.5-3.0	7.2	7.1	12.0	8.1	0.5	150	650	80
<b>M6</b>	IN58-0619	0.8-3.0	9.6	9.5	15.0	10.5	0.6	200	1000	100
<b>M8</b>	IN58-5821	0.9-3.0	10.6	10.5	16.0	11.5	0.6	300	1400	200
<b>M10</b>	IN58-2022	1.0-4.0	12.7	12.7	19.0	13.9	0.7	400	2400	300
<b>M12</b>	IN58-1235	1.0-3.5	15.0	14.9	21.0	17.0	0.7	-	-	-

1Kgf.cm = 0.098 N.m Kgf = 9.807N

0921

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.  
The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.  
We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.