


IN9498 CE Series

Full Hex Body / Large Flange / Closed End

Large flange head, used in conjunction with a hexagon hole to give maximum resistance to applied torque or unscrewing torque. For applications where sealing to prevent the ingress of solids or moisture is desirable.

Material: Low carbon steel

Finish: Zinc clear Cr3

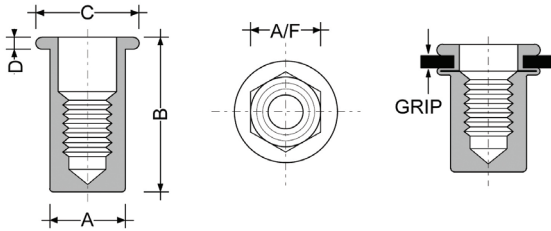

Thread Size	Part Code	Grip mm	Hex Hole A/F mm	A mm	B mm	C mm	D mm	Push Out Kgf	Pull Out Kgf	Ultimate Torque Kgf.cm
M4	IN9498-0420CE	0.5-2.0	6.0	5.9	16.0	9.0	1.0	250	700	45
M5	IN9498-0530CE	0.5-3.0	7.0	6.9	20.0	10.0	1.0	400	1100	80
M6	IN9498-0630CE	0.5-3.0	9.0	8.9	23.0	13.0	1.5	600	1500	150
M8	IN9498-0830CE	0.7-3.0	11.0	10.9	26.0	16.0	1.5	750	2100	400
	IN9498-0855CE*	3.0-5.5	11.0	10.9	28.5	16.0	1.5	700	2100	400

Check for availability *

0921

1Kgf.cm = 0.098 N.m Kgf = 9.807N

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.