


INOX Series

Flush Finish / Open End / Fully Machined

Low profile head. Optimal for low load bearing applications in thin sheet.

Material: Stainless Steel 304 / A2

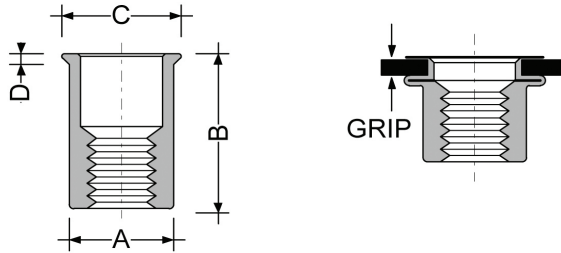

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Push Out Kgf	Pull Out Kgf	Ultimate Torque Kgf.cm
M3	INOX-0310	0.5-1.5	4.8	4.7	9.2	5.5	0.5	150	500	25
M4	INOX-0413	0.5-2.0	6.4	6.3	10.5	7.0	0.5	250	900	50
M5	INOX-0514	0.5-3.0	7.2	7.1	12.0	8.0	0.5	300	1400	100
M6	INOX-0619	0.5-3.0	9.6	9.5	14.6	10.5	0.5	350	2100	200
M8	INOX-5821	0.5-3.0	10.6	10.5	16.2	11.5	0.5	400	3500	500
M10	INOX-1022*	1.0-3.5	14.5	14.3	18.9	15.6	0.7	400	4300	–
M12	INOX-1242	1.0-4.0	16.0	15.9	22.5	17.2	0.7	700	5500	–

Not available *

0921

1Kgf.cm = 0.098 N.m Kgf = 9.807N

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet.
The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses.
We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.