

Plus Nut Series


Steel / Flanged Head / Pre Bulbed

The Plus Nut has been designed to provide the ultimate pull-out strength in thin metals and plastic. Its slotted body splits into four legs providing a wide load-bearing surface on the backside of the parent material. The Plus Nut also features the widest grip range of any blind threaded nut and is pre-bulbed for easier installation.



Material: Low carbon steel

Finish: Zinc clear Cr3

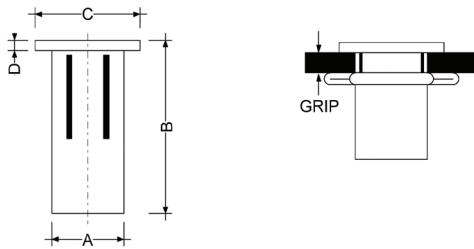

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Push Out Kgf	Pull Out Kgf	Ultimate Torque Kgf.cm
M5	INPNS-0504*	0.5-4.5	7.5	7.5	22.0	12.7	1.0	-	-	-
	INPNS-0508*	4.5-8.1	7.5	7.5	24.8	12.7	1.0	-	-	-
M6	INPNS-0607-P	0.5-7.1	10.0	8.8	26.9	15.9	1.5	-	1900	122
	INPNS-0613-P	7.1-12.7	10.0	8.8	32.8	15.9	1.5	-	1900	122
M8	INPNS-0807-P	0.5-7.1	12.7	11.1	30.5	19.0	1.6	-	2500	214
	INPNS-0813-P	7.1-12.7	12.7	11.1	36.5	19.0	1.6	-	2500	214
M10	INPNS-1007-P	0.5-7.1	15.1	15.0	33.1	22.3	2.2	-	3000	306

Not Pre-bulbed *

0921

1Kgf.cm = 0.098 N.m Kgf = 9.807N

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.